

VANTRUE

Nexus 5 **N5**

QUICK START GUIDE **V4**



vantrue.net
vantrue.com

truly driven.



VANTRUE

www.vantrue.net/contact



facebook

facebook.com/vantrue.live



Instagram

instagram.com/vantrue_official/



LINE

ID: @860fnbxk

Contents

01	What's in the box?	1
02	Camera Overview	2
03	Installation	4
04	Basic Operation	12
05	Specifications	31
06	Safety Warnings	33
07	Warranty & Support	34

Warm Tips:

1. Please read the User Manual carefully before use;
2. The dash cam must be plugged in to operate;
3. Please do not debug the product or use your mobile phone to watch driving videos during driving, and pay attention to driving safety;
4. This product requires the insertion of an SD card for use. Please use a functional SD card;
5. Do not disassemble or repair the dash cam casing by yourself. If the product malfunctions, please contact the official VANTRUE.
6. Do not install the dash cam in a location that may obstruct the driving view;
7. Please use this product away from high temperature and humid environments;
8. In order to improve the product experience, the firmware of the product will be updated periodically. If necessary, you can update the firmware to experience it;
9. Do not install the dash cam directly in front of passengers to prevent accidental detachment and potential safety hazards;
10. Please note that it may not be possible to connect to the app when using CarPlay or Android Auto;
11. Please use this product within the scope permitted by law.

1. What's In The Box?




A. Vantrue N5 Dash Cam



B. Rear Camera




C. GPS Adhesive Mount



D. Car Charger with Built-in Type-C Cable (11.5ft)



E. Rear Camera Cable (20ft)



F. Type-C USB Data Cable (3.3ft, for data transfer only)



G. Electrostatic Stickers*2



H. Crowbar




I. Dust-free Cloth



J. Warning Stickers *2



K. 3M Adhesive Stickers*2



L. User Guide



M. Bracket Adhesion Promoter



N. Base for GPS Adhesive Mount



O. Cable Clip

Optional Accessories



P. CPL Filter




Q. Wireless Remote Control





R. Vantrue Hardwire Kit Cable

2. Camera Overview

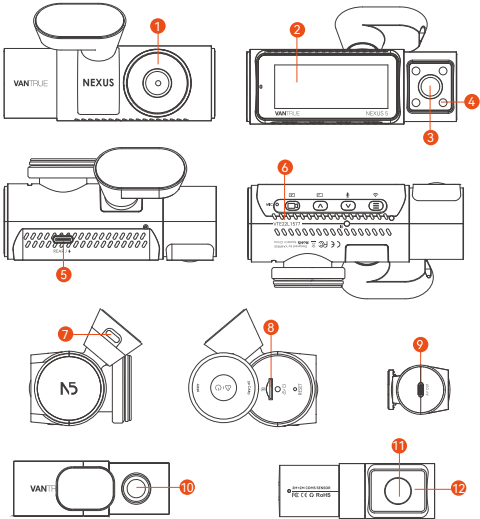

1. Front Facing Camera
2. 3.19 inch IPS Screen
3. Front Cabin Camera
4. Infrared Lights for Front Cabin Camera
5. Type-C USB Port for Rear Camera Connection or Data Transferring
6. Serial Number
7. Type-C USB Port for Charging
8. MicroSD Card Slot
9. Type C USB Port for Rear Camera Cable
10. Rear Camera for Back Recording
11. Rear Cabin Camera
12. Infrared Lights for Rear Cabin Camera

Button Instruction




1. In power-on status, long press to turn off the dash cam; In power-off status, short press to turn on dash cam; During video recording, short press to capture a picture; In playback mode, short press to pop up the delete Menu;
2. During video recording, short press to start/stop recording; In menu settings, short press to confirm the action; In playback mode, short press to play/pause the file;
3. During video recording, short press to switch the video window; In menu settings and file browsing, short press to display the previous option, long press to scroll up to display options; In playback mode, short press to fast forward;
4. During video recording, long press to quickly enter parking mode, and short press to turn on/off the microphone; In menu settings and file browsing, short press to display the next option, long press to scroll down to display options; In playback mode, short press to pop up the delete file menu;
5. In the recording mode, long press to turn on/off WiFi; In menu settings and file browsing, short press to return to the previous interface;
6. Short Press to force reset the device.


Led Indicator

Steady Green Light In standby status

Blinking Green Light Camera is recording




Screen Overview

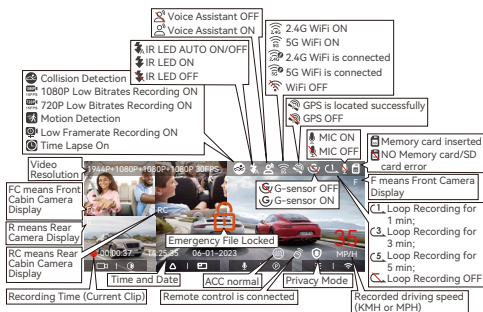


3. Installation


3.1 Installing a Memory Card (Recommended Vantrue U3 High-speed Microsd Card).

Please insert a memory card (memory card capacity: 32GB-1TB, card speed: U3/Class10/A2) into the card slot according to the direction indicated in below picture, until a "click" sound is heard in the card slot, indicating that the memory card is inserted properly.



After inserting the memory card, if the screen prompts "Card error, please format" (please note that the recorder does not record at this time), please directly press the button to enter the menu, then go to "system setup" and choose "format" to start the formatting process.



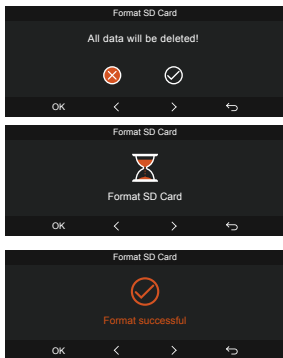


Note:

- The dashcam has certain requirements on the card speed of the memory card. For reliable operation, please use memory card speed: U3/Class10/A2, we recommend using a VANTRUE SD card(sold separately).
- The microSD card should be formatted once a month to maximize the lifetime of the memory card.
- Please do not take the card out when the camera is recording in case the important video file missing.


3.2 Installation

3.2.1 Installation of Camera Mount

Align the mount with the dash cam mount interface then push in until the mount is installed.




The GPS bracket adopts a new split structure. Users don't need to remove the entire bracket. They only need to separate the bracket body from the bracket base to remove the bracket.




3.2.2 Car Charger Installation

Connect one end of the car charger to the car cigarette lighter and the other end to the Type C port on the front camera mount. Start the ignition, waiting for the dash cam to start.




3.2.3 Power On Dash Cam, Select the Installation Position

Before installation, please power on the dash cam and check whether the shooting angle of the front and interior lens are appropriate through the recording view.




3.2.4 Installing the Electrostatic Stickers

Thoroughly clean the windshield with water or alcohol, then wipe it with a dry cloth. Stick the electrostatic sticker next to the rear-view mirror, which is the recommended position to prevent blocking your view while driving.




Note: The electrostatic stickers come with two-sided protective film. Please remove the protective film from No. 1, paste the

electrostatic sticker on the windshield, and then remove the protective film from No.2.



3.2.5 Installing The Front Camera

Remove the protective film from the mount, then fix the mount and camera on the electrostatic stickers.



Note: In order to install the bracket more firmly, we recommend applying bracket adhesion promoter on the ② side of the electrostatic sticker before installing the bracket.

3.2.6 Rear Camera Installation

Please select the installation position on the rear windshield. Remove the protection film of the sticky pad and rear camera lens. Fix the rear camera in the selected position and adjust the angle, then use the rear camera cable to connect the rear camera with the main front camera.




Note:

- When installing the rear lens, please avoid the defogging line on the rear windshield, so as not to affect the video effect.
- Please clean the lens with the dust-free cloth provided by VANTRUE.
- Please refer to the direction of screen printing to identify if you mount the rear camera correctly.
- The lens with red light is the rear cabin lens. The rear cabin camera should be installed on the right side facing the user.

- The front cabin camera can be adjusted to 45° up and down.
- The rear camera can be adjusted to 45° up and down.
- The rear cabin camera can be adjusted to 65° up and down.


3.2.7 Wire Storage

Car Charger Cable: Use the crowbar to stuff the car charger cable under the rubber seal of the A-pillar and windshield.



When organizing or storing car charger cables or rear camera wires, cable clips can be used for securing them in place. After attaching the cable clip to a suitable spot, simply fasten the cables within the clip.

Rear Camera Cable: Carefully store the rear camera cable in the direction shown in the picture.



3.3 APP Download

Please scan the QR code for the relevant version below to download the APP and install it.






Note: After this camera is successfully connected to your mobile phone through WiFi, it can perform real-time video preview, change camera settings, download files without internet connection, and play back videos on the mobile phone. However, the GPS track playback and video sharing functions will depend on the internet or telecom value-added services (requires you to turn off/disconnect the camera WiFi).

3.4 Wifi Connection

The dash cam will auto turn on WiFi for 10 minutes, after 10 minutes without a connection, it will automatically turn off the WiFi. You can reopen the WiFi through shortcut keys, voice control, or menus.

After turning on the WiFi function of the camera, please click "+" to find "N5" in the "Nexus Series" through Vantrue APP, choose the right dash cam to connect, then the app will automatically connect to the camera and display the current real-time recording situation of the camera.




Note:

- Before connecting WiFi, please make sure the WiFi function of your smartphone is enabled.
- The initial password for this device is only used for initial login. In order to prevent potential security risks, please be sure to change the initial password after the initial login to prevent others from logging into your device without authorization or other adverse consequences.
- If you forget the WiFi password, you can restore the default setting of the device, and the Wi-Fi password of the device will

also be restored to the default password(12345678).

3.5 APP Operation

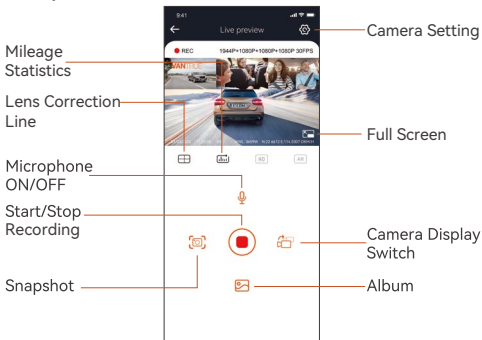


After the app is successfully connected to the camera, you can perform the following operations:

1. Video preview: In the real-time preview interface, you can switch to the full-screen preview mode by clicking the full-screen icon or placing the phone horizontally, click the window switch icon to switch video windows, only multi channel recording can use this feature.
2. Video playback: The video and photo files recorded on the SD card can be viewed in the app, and the video can be played back after clicking the file.
Video download: You can select the video or picture you want to download in the SD card browsing interface or in the video playback area. After downloading the video, if you play it in the local file of the app interface, you can view the GPS track of the video.
3. Video snapshot: You can capture the current screen in the real-time preview interface of the app.
Mileage statistics: You can click to download mileage information as required, and the mileage information will be saved in the APP as a picture or PDF file.
4. Lens correction line: Correct the lens balance via accurate crosshair so that the video screen will not be skewed.
5. OTA upgrade: You can upgrade the N5 dash cam via APP,

please refer to 4.2.12 for more details.

3.6 APP Upgrade

Open the "Vantrue" App, connect to Wi-Fi, enter "Settings> About> Detect New Version". The App will automatically detect whether its version is the latest version. If there is a new version of the app, follow the prompts and upgrade the version. □

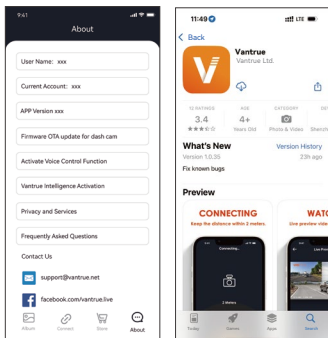


4. Basic Operation

4.1 Menu Settings

The N5 dash cam has 3 function menus, which are: record settings, system settings, and file browsing. You can set your dash cam according to your requirements with these function setting.

Press the (⏏) button to pause the video first, then press the (☰) button to enter the menu settings.



Record Setup:

A. Resolution: The N5 camera has 5 recording modes:
Front+Front Cabin+Rear Cabin+Rear Recording:

1944P+1080P+1080P+1080P 30FPS
1440P+1080P+1080P+1080P 30FPS
1440P+720P+720P+1080P 30FPS
1080P+1080P+1080P+1080P 30FPS
1080P+720P+720P+1080P 30FPS
720P+720P+720P+720P 30FPS

Front+Front Cabin+Rear Recording:

1944P+1080P+1080P 30FPS
1440P+1080P+1080P 30FPS
1440P+720P+720P 30FPS
1080P+1080P+1080P 30FPS
1080P+720P+720P 30FPS
720P+720P+720P 30FPS

Front+Rear Cabin+Rear Recording:

1944P+1080P+1080P 30FPS
1440P+1080P+1080P 30FPS
1440P+720P+720P 30FPS
1080P+1080P+1080P 30FPS
1080P+720P+720P 30FPS
720P+720P+720P 30FPS

Front+Front Cabin Recording:

1944P+1080P 30FPS
1440P+1080P 30FPS
1440P+720P 30FPS
1080P+1080P 30FPS
1080P+720P 30FPS
720P+720P 30FPS

Front+Rear Recording:

1944P+1080P 30FPS
1440P+1080P 30FPS
1440P+720P 30FPS
1080P+1080P 30FPS
1080P+720P 30FPS
720P+720P 30FPS

Front Recording:

2592x1944P 30FPS
2560x1440P 30FPS
1920x1080P 30FPS
1280x720p 30FPS

B. Loop Recording: Default setting is 1 min. You can choose the options among 1/3/5 min and OFF.

- C. IR LEDs:** The front cabin camera and rear cabin camera are equipped with IR LED lights. Default setting is Auto. You can select auto, on or off.
- D. G-Sensor:** Select the level of G-sensor you need, then you can set 3 directions (Front + Rear/Left + Right/Up + Down). The G-sensor value in each direction can be selected as 1/2/3 (default) /4/5/Off. The higher the sensitivity level, the easier it is to trigger event recording. G-sensor is the most sensitive when set to 5.
- E. Privacy Mode:** Default is OFF, you can also select on. After turning it on, the video will be recorded in privacy mode.
- F. Audio Recording:** The default is ON. Set recording to on or off.
- G. Audio Denoise:** The default is ON. It optimizes the audio recording effect by dynamic noise reduction. You can choose to turn it off.
- H. Exposure:** The default value is +0.0. Adjust the exposure of the lens.
- I. REC Status Light:** Default setting is ON. You can choose to turn on/off the recording status light.
- J. WDR:** The default is ON. You can choose to turn it off.
- K. Rear HDR:** The default is ON. Set to on or off.
- L. Rotate Display:** The default is off. You can choose to flip the front and front cabin video, rear and rear cabin screen up and down (180 degrees).
- M. Mirror:** The default is ON. If you turn it on, the front cabin, rear cabin, rear recording screen will be displayed in mirror mode.
- N. Number Plate:** Select the number or letter to be set. After setting, your license plate number can be displayed in the recorded video.
- O. Stamp:** Enable or disable the watermark stamp on video and photos. The watermark stamp includes time and date label, VANTRUE label, license plate number, GPS location information, and speed label. All enabled by default.
- P. Time Lapse:** The default value is disabled. You can choose to enable 1FPS/5FPS/10FPS/15FPS.
- Q. Parking Mode:** You can choose the parking mode you need, including Collision Detection/Motion Detection/Low Bitrate Recording/Low Framerate Mode/OFF, The default is OFF.
- R. Low-light Night Vision in Parking Mode:** The default is ON. When turned ON, it can optimize the recording effect of videos in parking mode.
- S. Collision Detection in Parking Mode:** Energy-saving Mode:

The default is ON. In Collision Detection, the N5 dash cam will be automatically turned off when no collision is detected. **Rapid Start-up Mode:** In Collision Detection, the N5 dash cam will rapidly start recording when any collision is detected.

T. Motion Detection Area: The motion detection range of the front and rear areas can be adjusted respectively.

U. Mileage statistics: The default is ON, and the GPS mileage information will be stored in the memory card, you can view it on the computer or export the file through the mileage statistics function in the APP.

V. GPS Settings: GPS is enabled by default. GPS ON/OFF settings, speed unit settings, and GPS information are all set here.

System Setup:

A. Language: Available languages are English/Français/Español /Deutsch/ Italiano/简体中文/русский/日本語/PolSKI/한국어.

B. Wi-Fi: You can set the WiFi function, switch WiFi mode, and view WiFi information here. The default is automatically turn off WiFi after 10 minutes without connection. WiFi will stay on in the background if you turn on the Auto ON option. The default WiFi mode is 5G. After turning on, you can connect the WiFi and operate the N5 dash cam through the mobile phone. WiFi Information Displays the WiFi name and password.

C. Voice Control: The default sensitivity is Standard. Voice commands can be recognized after the option is turned on. You can choose options such as low sensitivity/high sensitivity/standard/OFF.

D. Voice Content: Voice recognition commands. You can use different commands to remote control the camera to work.

E. Format Memory Card: Format all data on the memory card.

F. Format Reminder Setup: You can select the reminder options: 15 Days, 1 Month, and OFF. Default is off. When the time is up, you can choose "OK" to format, or choose "Next" to recalculate.

G. Date & Time: There are two ways to set the time and date:

- **Automatic GPS update:** GPS automatic update is enabled by default. The date and time will be automatically updated based on your time zone, please select the correct time zone. **Manual date/time setting.** You can choose to turn off automatic GPS update, turn on manual date/time setting, and manually correct date and time.
- **Summer/Winter time automatic switching.** The default is OFF. After this function is enabled, the system automatically switches

between summer time and winter time.

- **Time Format:** The default settings in recording interface is 24-hour time display, you can switch to 12-hour time display as needed. This settings only reflect in recording interface and watermark stamp of time label.

* This feature is available in North America only. Time error may occur in other regions.

The date format and time zone settings can also be set under this menu.

H. Auto LCD Off: The default is OFF. Set the time to automatically turn off the LCD display after no operation.

I. Screen Brightness: The default is Auto. The screen brightness will be automatically set to 50% after 10 minutes of no operation. You can choose different screen brightness by selecting options such as high/medium/low.

J. Device Sound: Set the volume of the device. The default volume level is 2, the lowest is 0, and the highest is 5.

K. Prompt Tone: According to different situations, the dash cam is set with 5 kinds of prompt tones, which are power-on/off sound, keys sound, file locked sound, format sound, and abnormal stop recording reminder. All prompt tones are turned on by default.

L. Frequency: Different countries have different frequencies. In order to avoid affecting the video, you can choose 50Hz or 60Hz frequency according to different regions.


M. System Info: Check the current model, firmware version, and the Vantrue official website.

N. Certifications: You can view the certification information of N5 camera.

O. Default Settings: Reset the device back to factory settings.

Files:

Review the video and photo files recorded by the camera.



A. Event: Critical event videos detected by G-Sensor activity or manually locked by user.

The file name format is:

20300128_140633_0008_E_A.MP4

20300128_140633_0008_E_B.MP4

20300128_140633_0008_E_C.MP4

20300128_140633_0008_E_D.MP4

B. Normal: Standard videos recorded. This folder saves loop recording video, parking mode video, time-lapse video, privacy mode video.

The file name format of Loop Recording video is:

20300128_140933_0008_N_A.MP4;

The file name format of Parking Mode video is:

20300128_140833_0007_P_A.MP4;

The file name format of Time-Lapse video is:

20300128_140733_0006_T_A.MP4;

The file name format of Privacy Mode video is:

20300128_140633_0005_S_A.MP4.

C. Photo: Photos files. The file name format is:

20210128_140633_0001A.JPG


D. All: All the standard videos and critical event videos recorded.

Note: The suffix A represents the files recorded by the front camera, the suffix B represents the files recorded by the front cabin camera, and the suffix C represents the files recorded by the rear cabin camera, and the suffix D represents the files recorded by the rear camera.

4.2 Key Features

4.2.1 Loop Recording



After inserting the memory card and connecting the power, the dash cam will automatically turn on and enter loop recording. The duration of each recorded video will be saved based on the loop recording time you set, saved in the normal video folder. When the capacity of the normal video folder reaches 70% of the total capacity, the new loop recording file will automatically overwrite the original loop recording files.



Note:


1. The normal operation of the loop recording function is very dependent on the speed of the memory card, so please format the memory card regularly to avoid problems such as excessive memory card files and card aging that affect the normal loop recording.
2. Please check the loop recording video regularly to avoid the necessary videos being overwritten by loop.
3. When Loop Recording is turned off, the video lock function will no longer work.
4. After the loop recording is turned off, the duration of each video will be 20 mins, and the recording will stop when the memory card capacity is full.

4.2.2 Event Recording

Event video is triggered by the G-sensor (Gravity Sensor), which can be automatically triggered or manually locked. During driving, in case of special circumstances, the camera will automatically lock for event recording or you can manually lock it by pressing the  button for event recording. During the lock video period, you can press the  button to capture multiple times. After recording, the video will be automatically saved in the event video folder, and the photo will be saved in the photo folder.



Automatic locking event video is triggered when the car is hit/shaken. The dash cam detects the vibration and automatically locks the current video, which is saved in the event video folder.




Note:

- The sensitivity of the automatic locking video trigger is determined by the sensitivity of the collision. The higher the sensitivity setting, the greater the probability of being triggered.
- The total capacity of the event video file accounts for 30% of the total capacity of the current memory card. When the event video file reaches the upper limit, the new event video file will automatically overwrite the old event video file. It is recommended to periodically check and save your event video files to avoid loss.
- Lock recording will not trigger in either of the following situations: Loop recording is off or Time lapse recording is on. You can only capture photos with loop recording off/ time lapse on.

4.2.3 Low-light Night Vision in Parking Mode

In order to enhance the safety of parking at night, we make full use of the lens performance combined with low-light night vision technology to improve the night vision effect in parking mode. The default is ON. It will be triggered only after entering the parking mode and will not affect normal recording.





Low-light Night Vision Off



Low-light Night Vision On

4.2.4 Motion Detection Area

The motion detection range of the front and rear areas can be adjusted respectively, and the set range can be adjusted up and down, left and right.




Note:

- This feature only works in motion detection parking mode.
- You can select 1X, 2X, 3X, 4X, or 5X range. The 5X range is the global detection mode.

4.2.5 Parking Mode

Parking Mode operates as a sentry function under different situations. You can switch to different parking monitoring modes according to different parking situations.



After the parking mode is turned on, there are three ways to Record:


1. You can wait for 5 minutes to start automatically.
2. long press the (⏻) button to begin manually.
3. Install the ACC hardwire kit and the dash cam will directly enter


after the car is stopped the engine (the ACC hardwire kit needs to buy separately).


Note:


- To ensure the camera works in park mode, please use the hardwire kits or other stable and continuous power supply to power the dash cam.
- Please use Vantrue hardwire kit for ACC hardwire, ACC hardwire kit from other brands may not work.
- When the temperature in the car is as high as 60°C(140°F), it is recommended that you turn off the camera to avoid abnormal operation of the camera caused by the high temperature.
- Time-lapse video recording and parking mode (including collision detection, motion detection, low bitrate recording, and low framerate mode) can only be enabled one at a time. When one is enabled, the other will be automatically disabled.
- All videos recorded in parking mode (Collision Detection, Motion Detection, Low Bitrate Recording, Low Framerate mode) will be saved in the normal video folder. In order to prevent the video in parking mode from being overwritten in a loop, please check and save the required files in time to prevent loss.

Collision Detection

When collision detection is enabled, the  icon will be displayed on the recording interface, indicating that the recorder is currently using collision detection mode. Collision detection sensitivity can be adjusted from 1 to 5 levels. You can adjust according to your habits, as well as the surroundings of the car.





When the collision detection is turned on, and no movement is detected after 5 minutes of recording (5-minute entry mechanism for short), then collision detection is activated with the  icon in the center of the screen, and the camera automatically turns off. When the dash cam is turned off, it will start to record for 1 minute after being shaken, then turn off the dash cam again.





Note: If the dash cam continues to be hit during the collision detection recording, it will exit the collision detection mode and enter normal recording, restarting the 5-minute entry mechanism.

Motion Detection

When the motion detection is turned on, the  icon will be displayed on the recording interface, indicating that motion detection has been turned on. Please go to “Motion Detection Area” to set the area range.





When the motion detection is turned on, and no movement is detected after 5 minutes of recording, then an orange  icon will appear in the center of the screen, and the screen will turn off after 3 minutes.



Video recording process: When the camera detects object movement, it will automatically trigger video recording for 30 seconds. After the motion detection recording ends, the camera will load a 10s pre-recorded video into the 30s motion detection video and save the 40s video to the normal folder.



Note: Motion detection mode can only be engaged when the camera is turned on. Once the camera is turned off, the motion detection mode will not work.


Low Bitrate Recording

When low bitrate recording is enabled, the  or  icon will be

displayed on the recording interface, depending on whether you choose 1080P 15FPS or 720P 15FPS.



If no movement is detected after 5 minutes of recording, there will be a  or  icon that appears in the center of the screen. The resolution of all current video will be automatically switched to 1080P 15FPS or 720P 15FPS for recording, and the recording duration will be determined according to the currently set loop recording duration. When the camera vibrates or is moved, it will automatically exit, wait 5 minutes, and enter again.




Note: Low bitrate recording can only be engaged when the camera is turned on. Once the camera is turned off, the low bitrate recording will not work.

Low Framerate mode

When the low framerate mode is selected, the camera will record according to your selection among 1FPS/5FPS/10FPS/ 15FPS. For example, if you select 1FPS and the current video resolution frame rate is 30FPS, the camera will generate a 30FPS video per

second. Low framerate mode can greatly preserve the integrity of the video and save space on the memory card.



[Normal Recording Time = Low Framerate Recording Time (Sec)
x Recording Frame Rate FPS/Low Framerate Option] (Time
should be converted into seconds)

Note:

- The time unit of the calculation formula is seconds, so the final normal recording time calculated is also in seconds. If you need to convert it into other time units, please check the units and convert by yourself.
- The low framerate mode is similar to the time-lapse recording function, there is a difference between the file name suffix.
- In low framerate mode, the camera also needs a stable power supply. Once the power is off or exhausted, the camera will shut down.

4.2.6 Privacy Mode

After enabling the privacy mode, only the latest 3 recording files will be saved.

For example: If you set the loop recording to 1 minutes, after enabling the privacy mode, when the third 1 minute recording ends, the new loop recording file will automatically overwrite the oldest file.



Note:


- Privacy file will be saved to the normal folder, and the file name contains character “S”. For example:
20210128_140633_0006_S_A.MP4
- Privacy mode can't be enabled when loop recording is off.
- Before enabling the private mode, please format the memory card.

- In privacy mode, manually locked video files will be saved in the Event folder, and the file name is the same as the emergency video file.

4.2.7 Mileage Statistics


The N5 dash cam can record, analysis and statistics your driving time, driving distance, altitude, driving speed and other information according to the GPS information.

You can click to download mileage information in the APP, and the mileage information will be saved in the APP as a picture or PDF file.



4.2.8 Voice Assistant


You can also control the camera with voice command, such as take photo, video start, turn on/off WiFi, lock the video, etc. Currently supported languages are English, Japanese, Russian, and Chinese. For more detailed voice commands, please check System Settings > Voice Content.



The default setting is standard sensitivity. Voice recognition has options such as low sensitivity/standard/high sensitivity/off.

4.2.9 Gps Function

The GPS function is one of the important functions of the dash cam. GPS is enabled by default, and the camera receives GPS signals through the GPS mount. It can automatically calibrate the time and date in your area, recording the location where the video was taken and the speed of the car at the time.




Note:

- The GPS connection will be completed within 1 minute after you turn on the device. If the GPS connection is not successful within 1 minute, please check whether the device has turned on the GPS function, whether the GPS bracket is properly connected, and whether your environment (underground parking lot, densely populated residential area, subway, tunnel, etc.) is affecting the reception of GPS signal.
- GPS information is recorded along with the video. To view it, please download and install the Vantrue APP and Vantrue

GPS Player (available for download at www.vantrue.net).

4.2.10 Gps Automatic Update Time& Date

The GPS automatic correction time setting for the N5 dash cam is turned on by default. You can select GMT-08:00 by selecting your time zone, such as Los Angeles. If you do not know the time zone of your location, you can use WiFi to connect to the Vantrue App, and confirm that the automatic time adjustment function in the APP is turned on.





4.2.11 Viewing and Deleting Video/Photos

a.Viewing and Deleting Files on the Camera


-Playback Files


After clicking "Files", enter any folder, and after opening the video folder, you can press the (v) button to select the next file, and delete the file during playback.



-Deleting Files


Go to "Files", choose a video on the dash cam, press the (🗑️) button in the file browsing interface to pop up the delete Menu.







b. Viewing and Deleting Files on Computer

1. Connect the included TYPE-C USB data cable to the camera and the computer.



2. After the connection is successful, the  icon will appear on the display of the camera to transfer data, and then you can view the video files in the computer folder.



3. Depending on the computer systems of different users, after the camera is connected to the computer, it will be displayed as a removable drive or a removable folder.
4. To view the files on the computer, you can directly access, right-click to open the menu and delete them.
5. You can also use a USB card reader to read the memory card information.
6. To ensure a stable power supply, please check whether the computer interface is a USB3.0 interface. When connecting to a desktop computer, it is recommended to use the USB port on the back of the host computer.

c. Viewing and Deleting on the "Vantrue" APP

After the camera is successfully connected to the mobile phone through WiFi, it can play back, download and delete files in the mobile APP.



Note:

- For video playback in the app, or downloads to SD card, there will be no network traffic consumption.
- You can view GPS track information only after the video file is downloaded and played back locally. At the same time, you need to disconnect the WIFI of the dash cam, otherwise the map information will be blank.

4.2.12 Upgrading Firmware

Option 1: File Upgrade

After downloading the latest N5 firmware via Vantrue Official Website, place the file into the root directory of the memory card, insert it back into the dash cam, power on to upgrade.





Option 2: OTA(OvertheAir) Firmware Update

After opening the APP, you will receive the firmware update push. Once confirming the upgrade, it will jump to the OTA upgrade interface, which can be upgraded according to the APP guidance.

Note:

- Please keep it plug in when upgrading.
- OTA requires network traffic to download upgrade files.

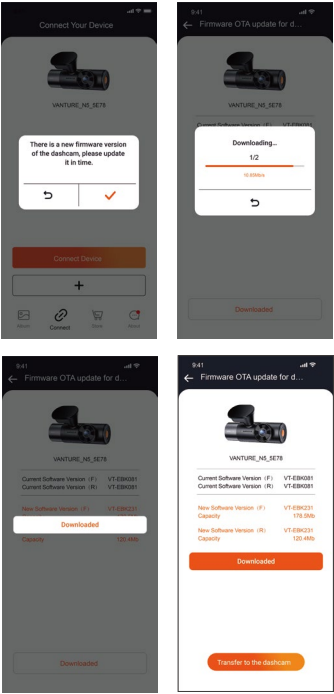

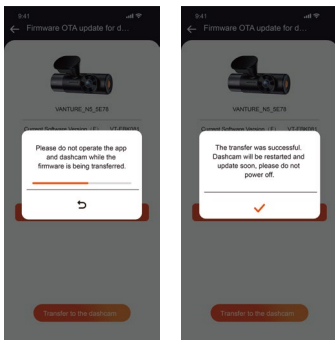

5. Specifications

The specifications of this product may change without prior notice due to product improvements.

Model	N5
Chips	Novatek high-performance processor
Image Sensor	Sony Sensor
G-sensor	Built-in triaxial sensor
Wifi	2.4GHz & 5GHz
Screen	3.19 inch IPS Screen
Camera Angle	Front: 158° wide viewing angle; Front Cabin: 160° wide viewing angle; Rear Cabin: 160° wide viewing angle; Rear: 165° wide viewing angle;
Aperture	Front: F1.8 Front Cabin: F1.8 Rear Cabin: F1.8 Rear: F1.8
Languages	English、简体中文、日本語、Deutsch、Italiano、Español、Français、Русский язык、Polski、한국어
Video Resolution	Front+Front Cabin+Rear Cabin+Rear: 1944P+1080P+1080P+1080P 30FPS 1440P+1080P+1080P+1080P 30FPS 1440P+720P+720P+1080P 30FPS 1080P+1080P+1080P+1080P 30FPS

1080P+720P+720P+1080P 30FPS

720P+720P+720P+720P 30FPS

Front+Front Cabin+Rear:

1944P+1080P+1080P 30FPS

1440P+1080P+1080P 30FPS

1440P+720P+720P 30FPS

1080P+1080P+1080P 30FPS

1080P+720P+720P 30FPS

720P+720P+720P 30FPS

Front+Rear Cabin+Rear:

1944P+1080P+1080P 30FPS

1440P+1080P+1080P 30FPS

1440P+720P+720P 30FPS

1080P+1080P+1080P 30FPS

1080P+720P+720P 30FPS

720P+720P+720P 30FPS

Front+Front Cabin:

1944P+1080P 30FPS

1440P+1080P 30FPS

1440P+720P 30FPS

1080P+1080P 30FPS

1080P+720P 30FPS

720P+720P 30FPS

Front+Rear:

1944P+1080P 30FPS

1440P+1080P 30FPS

1440P+720P 30FPS

1080P+1080P 30FPS

1080P+720P 30FPS

720P+720P 30FPS

Front:

2592x1944P 30FPS

2560x1440P 30FPS

1920x1080P 30FPS

1280x720p 30FPS

Video Format	Mp4
Image Format	JPEG
Audio	Built-in microphone and speaker
Memory Storage	External: 32GB-1TB Micro SD Card U3 (not included in the package)
USB Port	Type-C

Power Source	Built-in super capacitor
Supply voltage current	DC 5V 2.4A
Power	6w
Working Temperature	-4°F to 140°F(-20°C to 60°C)
Storage Temperature	-4°F to 158°F(-20°C to 70°C)

6. Safety Warnings

- This product is an auxiliary device for the purpose of recording exterior images of vehicles, and some functions may not be supported due to different driving and vehicle environments.
- Firmware upgrade will be carried out from time to time to further improve the product, please pay attention to the official notice of VANTRUE according to the specific upgrade.
- This product can record and save images of vehicle accidents, but it does not guarantee that all accident images can be recorded. The image may not be recorded in a special folder because the crash sensor cannot be activated for minor crashes.
- Be sure to turn off the power when inserting or removing the memory card.
- For stable use of the product, please format the memory card at least once a month.
- Generally, memory cards have a life span, and long-term use memory cards may result in data not being saved. In this case, if it is recommended to purchase a new memory card for use. If the data is destroyed due to the long-term use of the memory card, the company will not be held responsible
- Do not install or operate this product while the vehicle is running.
- Do not subject the product to strong shocks or vibrations, which may damage the product and cause malfunction or inoperability.
- Do not use chemical solvents or cleaning agents to clean the product.
- The ambient temperature range for normal use of this device is -20 degrees Celsius to 60 degrees Celsius. Exceeding this ambient temperature range may cause the product to malfunction.
- Do not place the product in an open flame. Do not use the product in high temperature and high humidity areas, as this may cause electric shock, short circuit, and other hazards and

- damage the product.
- It is forbidden to disassemble or modify the car charger by yourself, or use a short-circuit car charger, otherwise it will cause personal injury, electric shock, fire and other dangers or damage the product.
- Please do not disassemble or modify the product without permission to avoid damaging the recorder, generating heat and causing fire.
- Please use this product within the scope of the law.

7. Warranty & Support

Warranty

The VANTRUE® N4 Pro Dash Cam comes with a full 12 months warranty. If you register your product on our official site (www.vantrue.net/register), you can extend the warranty to **18 months**.

Support new

If you have any questions about the product, please feel free to contact us at **support@vantrue.net**, or leave us a message through the instant chat box: www.vantrue.net, or open the Vantrue APP, and find it in the FAQ on the "About" page Answer.

Your opinion matters

VANTRUE® is firmly committed to always improving our products, services, and user experience. If you have any thoughts on how we can do even better, we welcome your constructive feedback and suggestions. Connect with us today at **support@vantrue.net**.

Thank You for Choosing Vantrue !

VANTRUE
truly driven.



www.vantrue.net
www.vantrue.com

Made in China